


CH 300

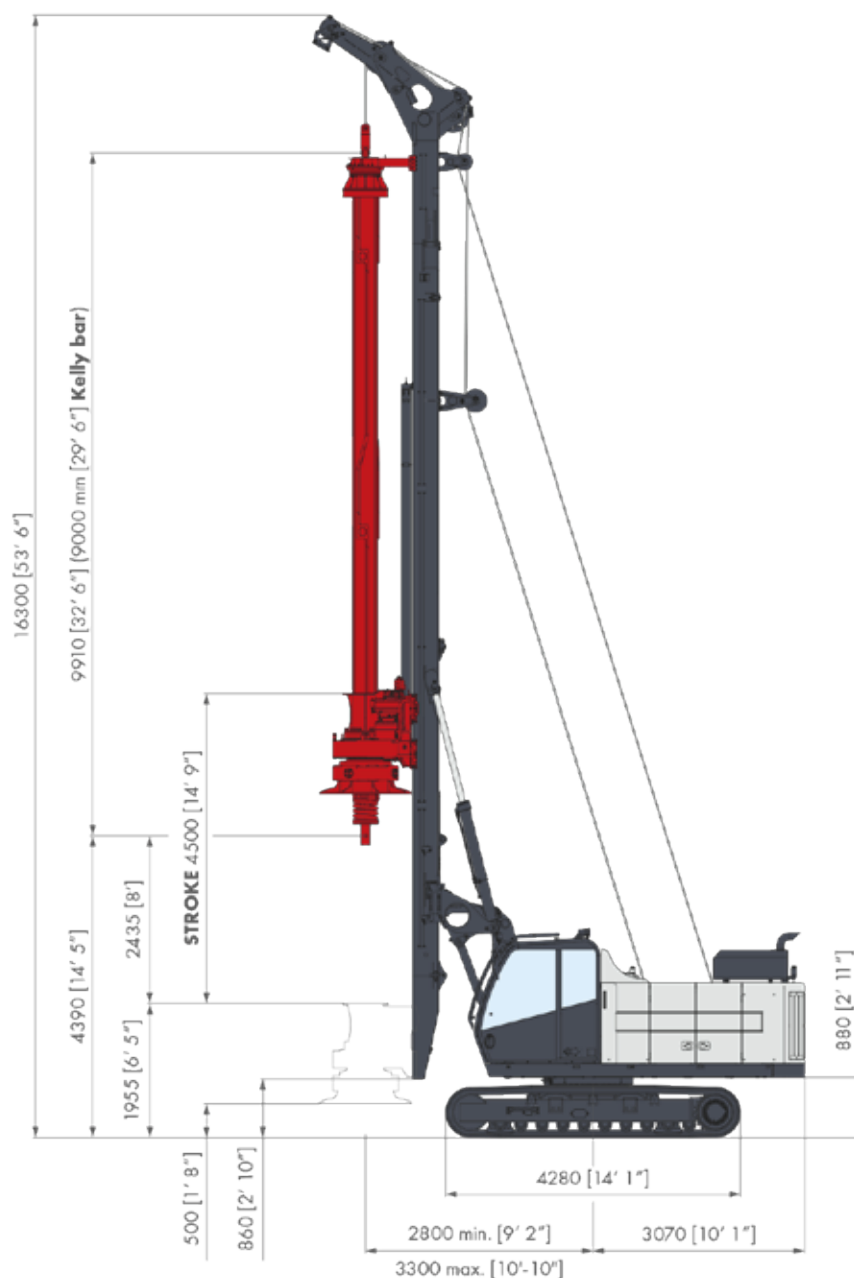

CC (Crowd Cylinder)	m.s.	i.s.		
Nominal max. torque	kNm	lbf-ft	132 at 35 MPa	97,300 at 5,076 psi
Max. torque	kNm	lbf-ft	113 at 30 MPa	83,300 at 4,350 psi
Engine power rating	kW	hp	123 -142 at 2000 rpm	165 - 190 at 2000 rpm
Max. pile diameter	mm	ft-in	1.300 ¹ / 1.500 ²	4' 3" ¹ / 4' 11" ²
Max. pile depth	mm	ft-in	47.000 ³	154' 2" ³
Operating weight w/o tool	ton		29,85 ⁴	
NOTES	1 - Tool in front of mast		3 - Using 5 elements kelly bar	
	2 - Tool below mast		4 - c/w 4 x 9.000 mm (4 x 29'6") long 355 mm (14") dia. Kelly bar; rotary c/w bucket opening flange	